





1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
B	A-1	NO.3 WAS CHANGED\RD-DM91062801Y\06-28-02'

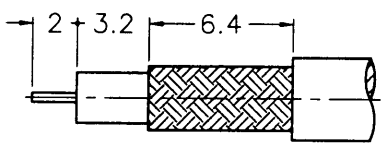

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

**SALES**

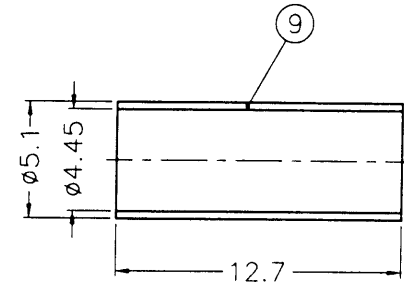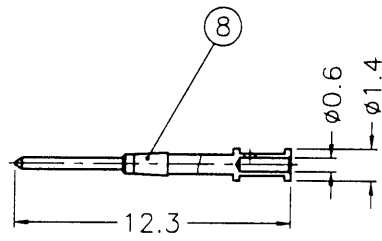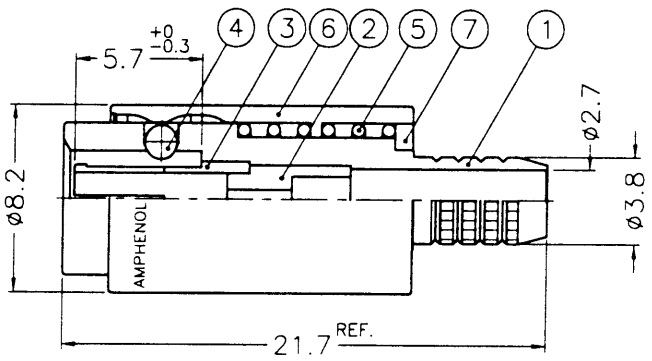

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS
  - BERYLLIUM COPPER
  - NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - NICKEL PL. (100 MIN./160 MAX.) THICK OVER COPPER PL. (100 MIN./160 MAX.) THICK
  - GOLD PL. (4 MIN./8 MAX.) THICK OVER NICKEL PL. (80 MIN./120 MAX.) THICK
  - PTFE (TEFLON MIL-P-19468)
  - GOLD PL. 5 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE

ISSUED  
2002. 6. 28  
R&D

- CRIMPED FERRULE  
HEX CRIMP SIZE .178"
- CONTACT PIN TO SOLDER

9	FERRULE	NOTE 1	NOTE 3	1	FR-51/445X127
8	CONTACT PIN	NOTE 1	NOTE 7	1	CP10AAV01A
7	RING	NOTE 1	NOTE 4	1	4M-379-01
6	OUTER BODY	NOTE 1	NOTE 4	1	3D-601-02
5	SPRING	STAINLESS STEEL	NATURAL	2	4M-170-02
4	BALL	STAINLESS STEEL	NATURAL	3	4M-169-01
3	OUT CONTACT	NOTE 2	NOTE 5	1	4G-980-01
2	INSULATOR	NOTE 6	NATURAL	1	4G-744-N34-75
1	BODY	NOTE 1	NOTE 4	1	3D-600-N34
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS				PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES				APPROVED	DATE
0.5-6 = ±0.2				<i>Andy. C</i>	06-27-02'
6-30 = ±0.4				CHECKED	DATE
30-120 = ±0.6				<i>Andy. C</i>	06-27-02'
120-315 = ±1				DRAWN	DATE
315-1000 = ±1.6				<i>Joyce. J</i>	06-27-02'
1000-2000 = ±2.4				FILE NO.	F:\DWG\123\1111L1\002\75\N5GT5G

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	1.0/2.3 PUSH-PULL CRIMP PLUG (FOR FLEX-3/75 CABLE)
DRAWING NO.	KJ-1231111L1-002-N/5GT5G-75
ITEM NO.	101111AAQ37LD7F

7RD-DR 14733 8

1 2 3 4 5 6 7 8