


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
B1	A-3	NO.4 WAS CHANGED\RD-DM91052301K\12-02-03'

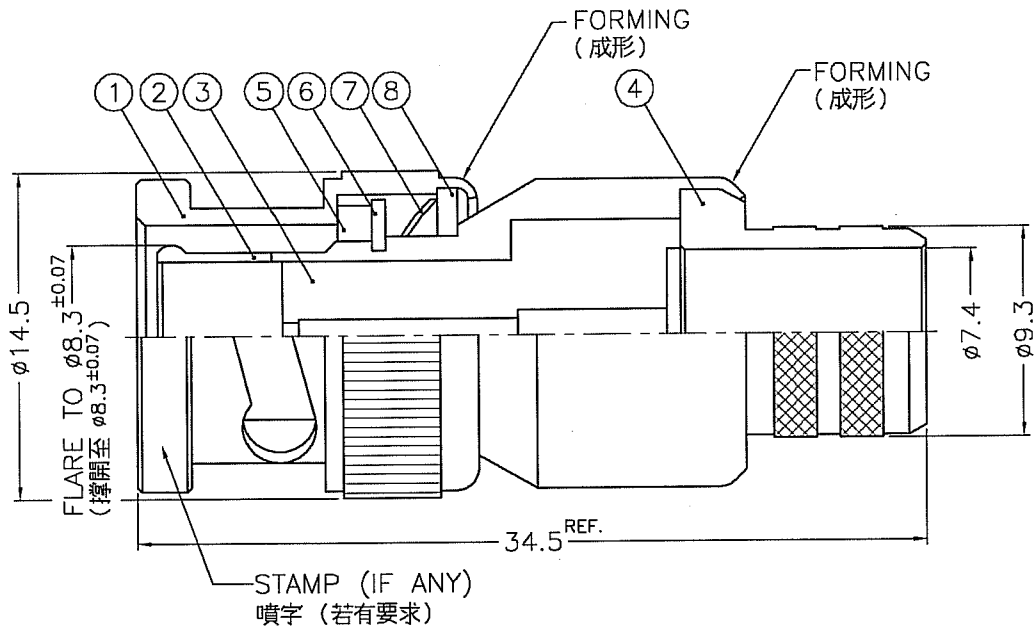

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)



1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
6. TEFLON MIL-P-19468
7. JIS H 3250, C 2600

10	FERRULE	NOTE 7	NOTE 3	1	FR-124/109X158
9	CONTACT PIN	NOTE 1	NOTE 5	1	B1141A2-13-21 /17
8	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
7	SPRING	SK5	NOTE 4	1	B50000-6
6	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
5	GASKET	RUBBER	RED	1	GS-115/8X15
4	BARREL	NOTE 1	NOTE 3	1	N5000-3-93/74 -B
3	INSULATOR	NOTE 6	NATURAL	1	B1141A2-3T-75
2	BODY	NOTE 1	NOTE 3	1	B1121A6-2
1	SHELL	NOTE 1	NOTE 3	1	B50000-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

PART NO.	
APPROVED	Tom
DATE	12-03-03'
CHECKED	Sharon
DATE	12-03-03'
DRAWN	Sharon
DATE	12-03-03'
FILE NO.	F:\DWG\B\1121A6\001\75\NT3G-B1SZ

Amphenol	
Danbury,CT,USA-Tainan,Taiwan-Shenzhen,China	
TITLE	BNC CRIMP PLUG
DRAWING NO.	B1121A6-001-NT3G-75
ITEM NO.	01121AAUA2NA7F

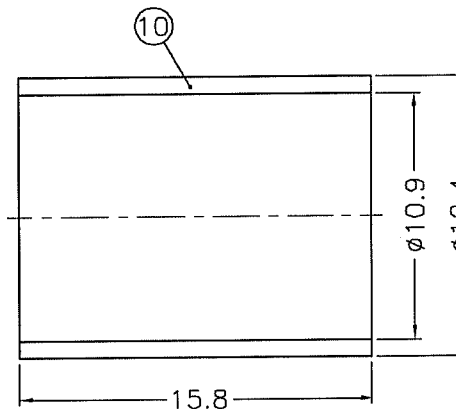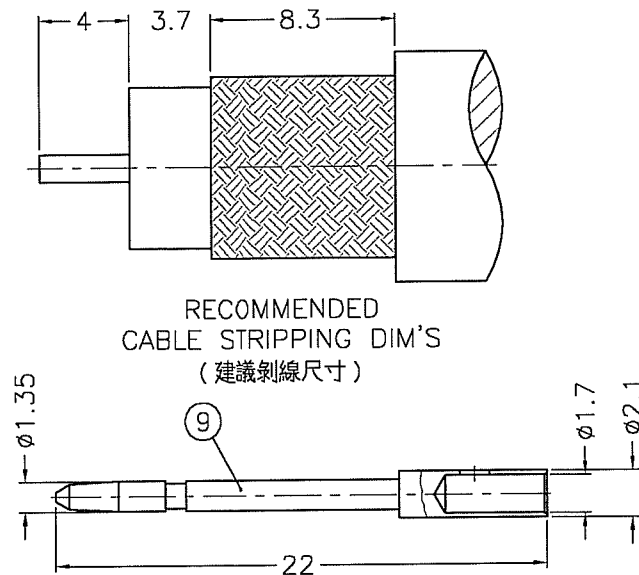

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

RD-02 1013