

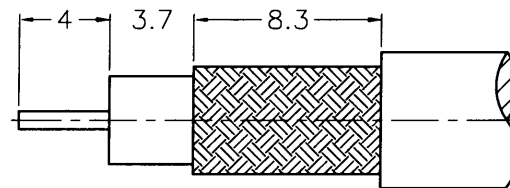
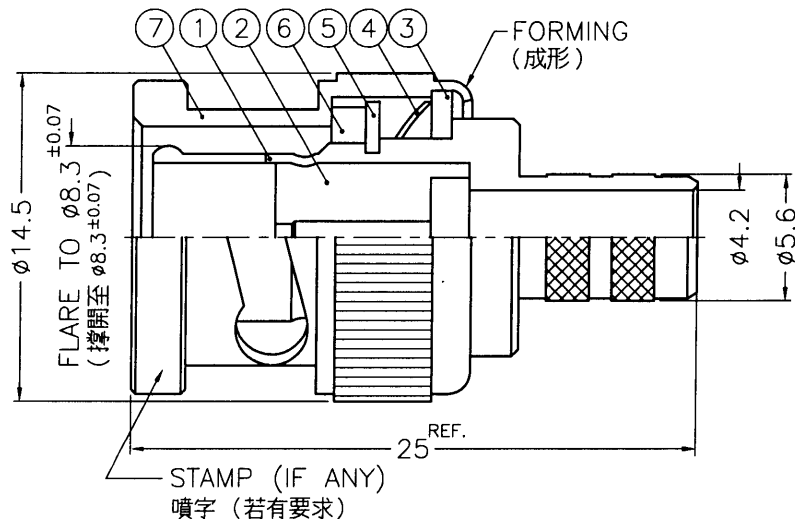


| REVISIONS |      |                              |  |
|-----------|------|------------------------------|--|
| ISS       | ZONE | DESCRIPTION\PER REQUEST\DATE |  |
|           |      |                              |  |

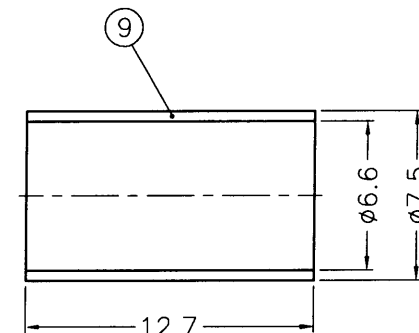

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

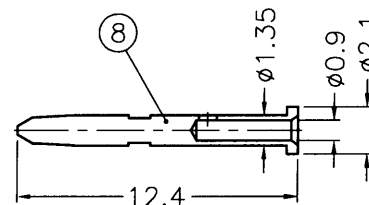

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
6. TEFLON MIL-P-19468
7. JIS H 3250, C 2600

1. CRIMPED FERRULE  
HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN  
SQ. CRIMP SIZE .043"

| 9   | FERRULE       | NOTE 7   | NOTE 3  | 1    | FR-75/66X127         |
|-----|---------------|----------|---------|------|----------------------|
| 8   | CONTACT PIN   | NOTE 1   | NOTE 5  | 1    | 10-03001-204-8-0.9-B |
| 7   | SHELL         | NOTE 1   | NOTE 3  | 1    | B50000-1-B           |
| 6   | GASKET        | RUBBER   | RED     | 1    | GS-115/8X15          |
| 5   | RETAINER RING | NOTE 1   | NOTE 3  | 1    | B50000-5             |
| 4   | SPRING        | SK5      | NOTE 4  | 1    | B50000-6             |
| 3   | WASHER        | NOTE 2   | NOTE 3  | 1    | WS-128/9X08          |
| 2   | INSULATOR     | NOTE 6   | NATURAL | 1    | 10-03001-204-3-A     |
| 1   | BODY          | NOTE 1   | NOTE 3  | 1    | B50000-2-56/42       |
| NO. | DESCRIPTION   | MATERIAL | FINISH  | Q'TY | DRAWING NO.          |

| DIMENSIONS ARE IN MILLIMETERS         |   |      |  |
|---------------------------------------|---|------|--|
| UNLESS OTHERWISE SPECIFIED TOLERANCES |   |      |  |
| 0.5-6                                 | = | ±0.2 |  |
| 6-30                                  | = | ±0.4 |  |
| 30-120                                | = | ±0.6 |  |
| 120-315                               | = | ±1   |  |
| 315-1000                              | = | ±1.6 |  |
| 1000-2000                             | = | ±2.4 |  |

| SCALE | 3/1 | ISSUE | A1 |
|-------|-----|-------|----|
|-------|-----|-------|----|

| PART NO. |                               |
|----------|-------------------------------|
| APPROVED | DATE                          |
| CHECKED  | DATE                          |
| DRAWN    | DATE                          |
| FILE NO. | F:\DWG\B\1121A9\FLEX6-75\NT3G |

| Amphenol                                    |                                         |
|---------------------------------------------|-----------------------------------------|
| Danbury,CT,USA-Tainan,Taiwan-Shenzhen,China |                                         |
| TITLE                                       | BNC CRIMP PLUG<br>(FOR FLEX-6/75 CABLE) |
| DRAWING NO.                                 | B1121A9-NT3G-FLEX-6-75                  |
| ITEM NO.                                    | 011121A AFC3NA7F                        |

7 RD 4R 228618